

Electrochemical Oxidation Approach towards the Treatment of Acetamiprid Pesticide from Polluted Water

Maryam Dolatabadi^{1,2}, Zahra Hajebrahimi^{3,4}, Roya Malekhamdi², Saeid Ahmadzadeh^{5,6*}

¹ Student Research Committee, Kerman University of Medical Sciences, Kerman, Iran.

² Environmental Science and Technology Research Center, Department of Environmental Health Engineering, School of Public Health, Shahid Sadoughi University of Medical Sciences, Yazd, Iran.

³ Vice-chancellor for Health of Sirjan School of Medical Sciences, Sirjan, Iran.

⁴ Department of Food Hygiene and Safety, School of Public Health, Shahid Sadoughi University of Medical Sciences, Yazd, Iran.

⁵ Pharmaceutics Research Center, Institute of Neuropharmacology, Kerman University of Medical Sciences, Kerman, Iran.

⁶ Pharmaceutical Sciences and Cosmetic Products Research Center, Kerman University of Medical Sciences, Kerman, Iran.

ARTICLE INFO

ORIGINAL ARTICLE

Article History:

Received: 16 December 2021

Accepted: 20 February 2022

*Corresponding Author:

Saeid Ahmadzadeh

Email:

chem_ahmadzadeh@yahoo.com

Tel:

+983431325241

Keywords:

Acetamiprid,
Advanced Oxidation Process,
Pesticide,
Water Purification.

ABSTRACT

Introduction: Acetamiprid (AP) is one of the most widely used pesticides in the neonicotinoid class. AP residues in the environment have received considerable due to their potential toxicity to humans. Therefore, it is important to remove AP from the aqueous solution.

Materials and Methods: In the current study, response surface methodology (RSM) was used as an efficient approach to optimize the removal of AP using the electro-Fenton (EF) process. The effects of the main variables, including reaction time, AP concentration, current density, and H₂O₂ dosage were investigated and optimized. ANOVA technique was also used to identify the Fisher's value (F-value) and P-value of the model.

Results: The predicted AP removal efficiency by the model was in good agreement with the obtained experimental results with correlation regression of 0.98. The ANOVA test proved that the developed quadratic model was significant with very low P-values less than 0.05, the high F-value of 240.1, and regression coefficients close to 1 at a 95% confidence level. The optimum condition for AP removal efficiency of 99.02% was attained at the reaction time of 12 min, AP concentration of 3.5 mg L⁻¹, the current density of 12 mA cm⁻², and H₂O₂ dosage of 86 μL.

Conclusion: RSM was employed as a suitable method to optimize the operating condition and maximize the AP removal. Herein, the EF process as an eco-friendly electrochemical advanced oxidation process (EAOP) successfully applied to remove AP from the water and wastewater.

Citation: Dolatabadi M, Hajebrahimi Z, Malekhamdi R, et al. *Electrochemical Oxidation Approach towards the Treatment of Acetamiprid Pesticide from Polluted Water*. J Environ Health Sustain Dev. 2021; 7(1): 1561-70.

Introduction

The lives of all biota, including humans, animals, and plants, are affected by the quantity and quality of water. Also, health, agricultural, industrial, and welfare activities are affected by water resources.

Due to the importance of water in the life of organisms, in recent decades, emerging pollutants

(Eps) (even in low concentrations) have been detected in water resources, which have caused a decrease in water quality and subsequent occurrence of diseases and environmental hazards¹⁻³. Eps include surfactants, personal care products, pharmaceutical compounds, and pesticides⁴⁻⁶.

The presence of Eps in water resources has caused many concerns in human societies. Today, due to increasing population growth, the need for food has increased. The use of pesticides in agricultural activities to increase crop production and pest control has found special and inevitable applications. Researchers have frequently detected the residues of various pesticides in surface water, groundwater, soil, and sediments. Pesticide residues in the environment pose a

serious threat to the living biota, since they have the potential for bio-accumulation, bio-magnification, and remain in the environment for a long time without decomposition⁷⁻⁹.

Acetamiprid (AP) is one of the most widely used insecticides and belongs to neonicotinoid pesticides (Figure 1). In particular, AP has attracted the attention of many farmers due to its affordable price, availability, and ability to deal with a wide range of plant pests¹⁰⁻¹².

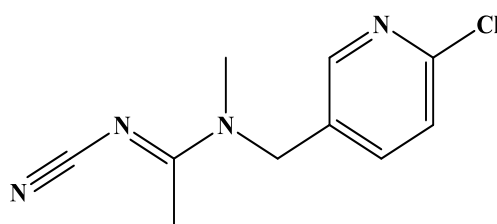


Figure 1: Structure of AP as a neonicotinoid pesticide


The presence of AP in the environment causes health problems, such as tremors, nausea, headaches, decreased or lost memory, weakened nervous system, and endocrine disruptors. In addition, studies have shown that AP presumably adversely affects the beneficial biota, including earthworms and bees¹⁰.

Therefore, its removal from water sources is of utmost importance. One of the most common environmental bottlenecks is focusing on designing efficient processes. Among the recent technologies, the electrochemical advanced oxidation processes (EAOPs) have proved to be a powerful oxidative approach for the degradation and removal of several organic pollutants. The electro-Fenton (EF) process is one of the most widely used EAOPs, which has shown good performance for treating resistant and refractory pollutants³. The basis of the EF process is the generation of hydroxyl radicals ($\cdot\text{OH}$) through electrochemical reactions¹³⁻¹⁵.

In EF, H_2O_2 (hydrogen peroxide) and Fe^{2+} ion promote a tremendous and fast generation of $\cdot\text{OH}$ according to Fenton's reaction based on Eq. 1.

The $\cdot\text{OH}$ species generated during the EF process attack the organic pollutants molecules,

transforming them into more safe products, such as water and carbon dioxide. In this process, the Fe^{2+} ions are regenerated from Fe^{3+} owing to their cathode reduction, according to Eq. 2. This confirms the generation of $\cdot\text{OH}$ if the H_2O_2 is available¹⁶⁻¹⁸.



In the present study, response surface methodology (RSM) was used as an efficient approach to optimize the removal of AP using the EF process. The important operational parameters, including reaction time, AP concentration, current density, and H_2O_2 dosage, were considered. Finally, first-order and second-order kinetic models were investigated.

Materials and Methods

Chemicals

Analytical grade AP ($\text{C}_{10}\text{H}_{11}\text{ClN}_4$) was obtained from Sigma-Aldrich Company. Acetonitrile (CH_3CN) HPLC grade, sodium sulfate (Na_2SO_4), sulfuric acid (H_2SO_4), sodium hydroxide (NaOH), and hydrogen peroxide (H_2O_2 , 30% w/w) were purchased from Merck Company.

EF reactor setup

A cylindrical glass cell was used as the reactor. Two iron plates as anode and cathode electrodes with the same dimensions ($4.0 \times 0.8 \times 0.1$ cm) were placed parallel and at a constant distance (3.0 cm) from each other in the electrochemical reactor. The sample volume of 0.25 L with 0.05 M of Na_2SO_4 as supporting electrolyte and pH solution of 5.0 was constant in all the experiments. The pH of samples was adjustment adding NaOH or H_2SO_4 solutions. The current density was regulated using a DC power supply during the EF process. After

the electrochemical treatment process, the AP concentration was measured using the KNAUER Smartline HPLC system (C_{18} -250 \times 4.6, 0.5 mm). The wavelength was set at 242 nm. The mobile phases were acetonitrile (MeCN) and water (H_2O) in the ratio (30:70 v/v).

Experimental design

Central composite design (CCD) was applied to optimize variables, such as AP concentration, current density, and H_2O_2 dosage. The levels of independent variables for the AP removal using the EF process are summarized in Table 1.

Table 1: Level of independent variables for the AP removal using EF process

Variables (X_i)	Level				
	- α	-1	0	+1	+ α
$X_1 = \text{AP concentration (mg L}^{-1}\text{)}$	1	2.5	5.5	8.5	10
$X_2 = \text{Current density (mA cm}^{-2}\text{)}$	6	7.5	10	13.5	15
$X_3 = \text{H}_2\text{O}_2 \text{ dosage (}\mu\text{L)}$	20	34	60	87	100

The following equation was applied to evaluate and investigate the experimental results of CCD and to model the AP removal process using the EF process as follows¹⁹:

$$Y = \beta_0 + \sum_{i=1}^n \beta_i X_i + \sum_{i=1}^n \beta_{ii} X_i^2 + \sum_{i=1}^{n-1} \sum_{j=i+1}^n \beta_{ij} X_i X_j + \varepsilon \quad (3)$$

Where, Y (the removal percentage of AP using the EF process as a response), β_0 (intercept of the developed model), β_i (linearity effects), β_{ij} (interaction effects), β_{ii} (quadratics effects), and ε denotes the error. The ANOVA was conducted at a (95% confidence level) for validating the model and significance of investigated variables using statistical parameters, such as the sum of squares, mean square, degree freedom (df), probability level (P-value), Fisher's test (F-value), determination coefficient (R^2), and lack of fit²⁰⁻²².

Ethical issue

The current study was conducted in the spring and summer of 2020, after receiving approval from

the ethics committee of Kerman University of Medical Sciences [IR.KMU.REC.1398.674].

Results**Effect of reaction time on the AP removal efficiency**

The effect of reaction time was investigated from 2 to 15 min on AP removal. The AP concentration, pH solution, current density, and H_2O_2 dosage were kept constant at 4.0 mg L^{-1} , 5.0, 9 mA cm^{-2} , and $50 \mu\text{L}$, respectively, the results of which are shown in Figure 2. After 10 min of EF process, the AP removal efficiency significantly increased, but after 12 min, the AP removal efficiency reached the constant value of about 83%. Thus, the optimum reaction time was determined to be 12 min.

RSM model fitting

The designed matrix and experimental result of AP removal using the EF process are shown in Table 2.

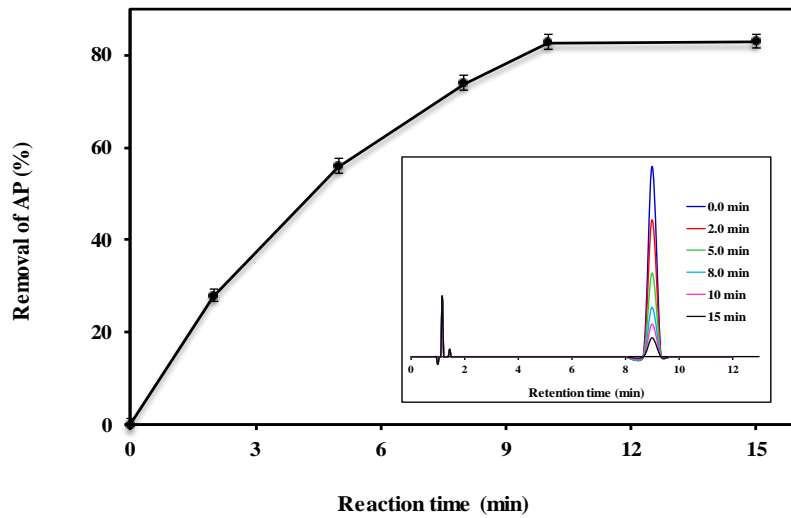


Figure 2: The effect of reaction time on the AP removal efficiency

Table 2: Designed matrix and experimental result of AP removal using EF process

Run	Actual value			Coded value			AP removal (%)
	X ₁	X ₂	X ₃	X ₁	X ₂	X ₃	
1	8.50	7.50	86	1	-1	1	75.9
2	2.50	13.50	86	-1	1	1	98.1
3	5.50	6.00	60	0	-1.5	0	70.5
4	1.00	10.50	60	-1.5	0	0	94.4
5	8.50	13.50	86	1	1	1	91.2
6	10.0	10.50	60	1.5	0	0	78.3
7	5.50	15.00	60	0	1.5	0	85.6
8	5.50	10.50	60	0	0	0	86.8
9	2.50	7.50	86	-1	-1	1	84.8
10	5.50	10.50	60	0	0	0	86.1
11	8.50	13.50	33	1	1	-1	76.7
12	5.50	10.50	100	0	0	1.5	93.1
13	5.50	10.50	60	0	0	0	85.8
14	5.50	10.50	60	0	0	0	85.6
15	5.50	10.50	20	0	0	-1.5	80.1
16	8.50	7.50	33	1	-1	-1	72.6
17	5.50	10.50	60	0	0	0	85.3
18	5.50	10.50	60	0	0	0	85.4
19	2.50	13.50	33	-1	1	-1	84.9
20	2.50	7.50	33	-1	-1	-1	81.3

The relevance between the AP removal efficiency as the response and the significant variables demonstrated by a quadratic model is as follows:

$$\text{Removal AP}(\%) = 86.21 - 4.55X_1 + 4.72X_2 + 4.32X_3 + 2.61X_2X_3 - 3.38X_2^2 \quad (4)$$

In this equation, Y is the AP removal (%), and X₁ to X₃ denote the coded independent factors of AP concentration, the current density, and H₂O₂ dosage, respectively. The adequacy of the

proposed model was investigated using the ANOVA test and summarized in Table 3. The correlation coefficient between the predicted and actual values of AP removal efficiency was computed to be 0.98, indicating that the developed model could not describe only 1.15% of the total variance in the response. Moreover, the observed variation of less than 0.20 between the adjusted R² (Adj. R² = 0.98) and the predicted R² (Pred. R² = 0.97) confirmed the significance of the model.

Table 3: ANOVA results of the developed model

Source	Sum of squares	df	Mean square	F-value	p-value
Model	942.13	5	188.43	240.10	< 0.0001
X ₁	258.55	1	258.55	329.46	< 0.0001
X ₂	278.01	1	278.01	354.25	< 0.0001
X ₃	233.28	1	233.28	297.26	< 0.0001
X ₂ X ₃	54.60	1	54.60	69.58	< 0.0001
X ₂ ²	117.69	1	117.69	149.96	< 0.0001
Residual	10.99	14	0.78	-	-
Lack of Fit	9.45	9	1.05	3.43	0.0943
Pure Error	1.53	5	0.31	-	-
Cor Total	953.12	19	-	-	-
R ² = 0.9885		Adjusted R ² (Adj. R ²) = 0.98		Predicted R ² (Pred. R ²) = 0.97	

In Figure 3-a, the obtained experimental values for the removal efficiency of AP were compared to the predicted values by the model. Also, the data were investigated to assess the normality of the residuals. The normal probability

plots of the internally studentized residuals are presented in Figure 3-b. The adequate agreement between the actual (experimental values) and the predicted values confirmed the normality of the results.

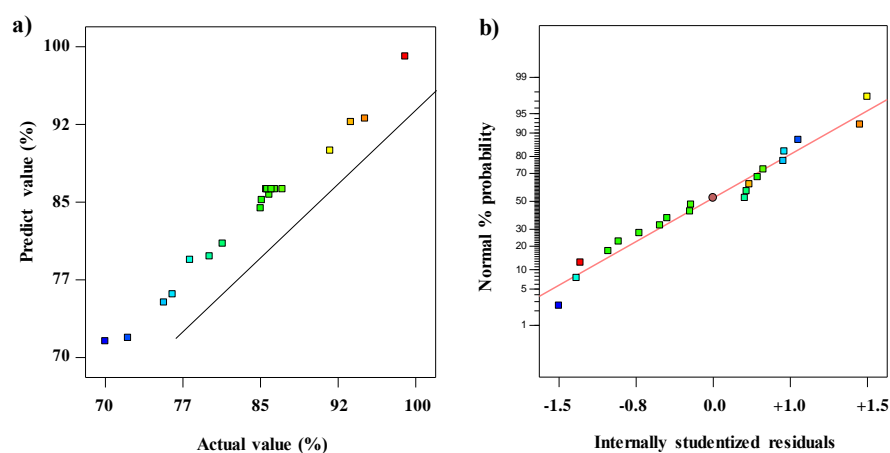


Figure 3: Statistical analysis of the AP removal efficiency model (a) the actual vs. predicted value, (b) normal% probability vs. internally studentized residual

Effect of significant parameters on the removal efficiency of AP

Figure 4 shows a 3D response surface plot of removal as a function of AP concentration and the current density at the constant values of H₂O₂

dosage of 60 μL, pH solution of 5.0, and reaction time of 12 min. The result shows that the AP removal decreased from 92.7% to 79.4% by increasing the AP concentration from 1 mg L⁻¹ to 10 mg L⁻¹.

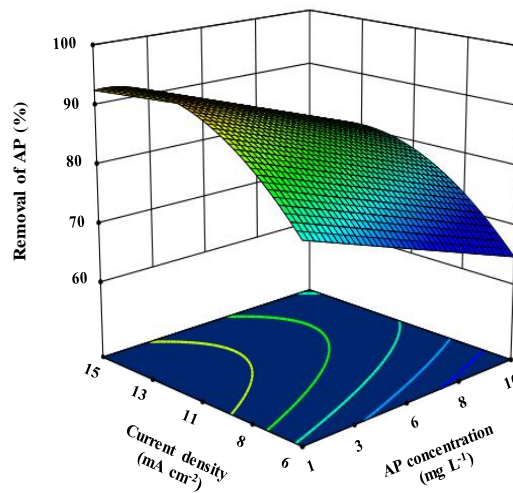


Figure 4: 3D plot of the current density vs. AP concentration (H_2O_2 dosage of $60 \mu\text{L}$, pH solution of 5.0, and reaction time of 12 min)

The removal efficiency of AP increased by increasing the current density. In contrast, the current density was raised from 6 to 12 mA cm^{-2} , the removal efficiency rose from 71.2% to 88.6% . However, by increasing the current density from 12 to 16 , the removal efficiency decreased from 88.6% to 85.4% .

H_2O_2 dosage played a critical role in the AP removal efficiency throughout the EF process. Usually, the removal efficiency of pollutants increases by increasing H_2O_2 concentration. Herein, the removal efficiency increased from 79.2 to 92.8% by increasing the H_2O_2 dosage from 20 to $100 \mu\text{L}$ (Figure 5).

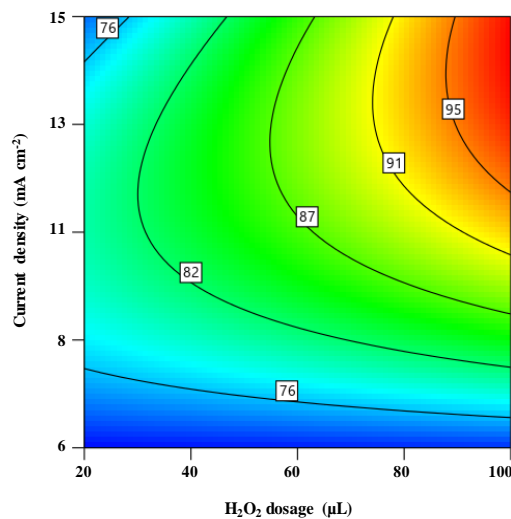


Figure 5: Contour diagram of the current density vs. H_2O_2 dosage (AP concentration of 5.5 mg L^{-1} , pH solution of 5.0, and reaction time of 12 min)

Kinetics study

To find out the exact mechanism of the AP removal, kinetics investigations were carried out using first and second-order models. The obtained

experimental results are displayed in Table 4, which indicates that the first-order model with the satisfactory correlation coefficient of 0.99 best fitted to the achieved results²³⁻²⁶.

Table 4: Parameters of kinetic models for the AP removal

Kinetics model	Equation	k_{app}	R^2
First-order	$\ln\left(\frac{C_0}{C_t}\right) = +kt$	0.174 min^{-1}	0.99
Second-order	$\frac{1}{C_t} = kt + \left(\frac{1}{C_0}\right)$	$0.0925 \text{ L.mg}^{-1}\text{min}^{-1}$	0.91

Discussion

Statistical analysis


The results of ANOVA are presented in Table 3. The model was significant and can be applied successfully for estimating the AP removal efficiency using the EF process. The regression coefficient ($R^2 = 0.98$) agrees well with the adjusted regression coefficient ($\text{Adj.}R^2 = 0.98$). The Adeq precision describes the signal-to-level noise ratio, where the ratio of 56.66 is greater than 4, indicating the adequacy of the developed model^{27, 28}. In Figure 3, the appropriate and close distribution of data points around a straight line proved the potential and ability of the model to suitably predict values and normally distribute experimental data.

Effect of significant parameters


The influence of AP concentration in the range of 2 to 10 mg L⁻¹ was investigated. The obtained results showed that the AP removal efficiency decreased by increasing the AP concentration, which can be ascribed to the limited number of $\cdot\text{OH}$ radicals compared to the increasing number of AP molecules²⁹⁻³¹.

The results of the investigation of current density showed that increasing the current density causes an improvement in the AP removal efficiency. By increasing the current density, the amount of anodic dissolution of iron increased, resulting in a much great generation of Fe^{2+} . The increasing concentration of Fe^{2+} iron could enhance the Fenton reaction, which produced the $\cdot\text{OH}$ radical as a favorable driving force of the treatment process. Moreover, by increasing the current density, the level of H_2 bubble generation increased, and the bubble size decreased, which both benefited the treatment process through the flotation mechanism. However, beyond the

optimal concentration of Fe^{2+} , the slight reduction in the removal efficiency was observed, which is probably due to the following reaction. In the high concentration of iron cations, the $\cdot\text{OH}$ radicals are trapped by Fe^{2+} as described below³²⁻³⁴.



To obtain the maximum AP removal efficiency, the optimal dosage of H_2O_2 should be employed. Although increasing the dosage of H_2O_2 enhanced the AP removal efficiency due to accelerating the generation of $\cdot\text{OH}$ (see reaction 1), it cannot be added without any limitation. The excessive H_2O_2 not only increases the costs of operation, but also increases the scavenging effect of $\cdot\text{OH}$ by H_2O_2 (reaction 4), which has a negative effect on the removal efficiency of AP³⁵⁻³⁷.



Racar et al.,³⁸ studied the removal of various CECs, including AP, from municipal wastewater (MWW) using membrane bioreactor (MBR). In a mixture of CECs and at a concentration of $2.32 \pm 3.22 \mu\text{g L}^{-1}$ of AP in the influent, a removal percentage of 39.36% was obtained for MBR³⁸. Many CECs are effectively degraded using UV radiation and ozonation techniques. However, the irradiation experiments using marketed mixtures containing AP resulted in a variety of photoproducts, which were also toxic for vertebrates and non-target species⁹.

Cruz-Alcalde et al.,¹⁰ reported that the toxicity of transformation products (TPs) in the solution increased with increasing the ozone dose and then decreased. Similar toxic TPs were observed during photo-Fenton treatment of AP in race-way ponds¹². Yao et al.,³⁹ fabricated ytterbium (Yb) doped- PbO_2 electrodes for electrochemical oxidation of AP. All the degradation products were decontaminated into CO_2 and H_2O .

Process optimization

In optimizing the AP removal process by design expert software, the desired ranges for each factor and response were selected as the final goal. The numerical optimization provided an opportunity to find a treatment condition with the maximum desirability function. Herein, the main goal was to maximize the removal of AP by the EF process. The optimum AP removal efficiency of 99.02% was attained at the 3.5 mg L⁻¹ AP concentration, the 12 mA cm⁻² current density, and 86 µL H₂O₂ dosage.

Conclusion

In the current study, the RSM was used to assay the effects of important parameters of the AP removal using the EF process using iron electrodes. The maximum removal efficiency of AP (99.02%) was achieved in the condition of 3.5 mg L⁻¹ AP concentration, 12 min reaction time, 86 µL H₂O₂ dosage, and 12 mA cm⁻² current density. According to the developed model, the current density was identified as the most effective parameter in the removal AP using the EF process.

The first-order model well fitted the kinetics data obtained from the batch experiments.

Acknowledgments

The authors would like to express their appreciation to the Student Research Committee of Kerman University of Medical Sciences for supporting the current study.

Funding

This study received a grant from the Kerman University of Medical Sciences [Grant number 98001096].

Conflict of interest

The authors declare that they have no conflict of interest regarding the publication of the current paper.

This is an Open-Access article distributed in accordance with the terms of the Creative Commons Attribution (CC BY 4.0) license, which permits others to distribute, remix, adapt, and build upon this work for commercial use.

References

1. Krzeminski P, Tomei MC, Karaolia P, et al. Performance of secondary wastewater treatment methods for the removal of contaminants of emerging concern implicated in crop uptake and antibiotic resistance spread: A review. *Sci Total Environ.* 2019;648:1052-81.
2. Teodosiu C, Gilca A-F, Barjoveanu G, et al. Emerging pollutants removal through advanced drinking water treatment: a review on processes and environmental performances assessment. *J Clean Prod.* 2018;197:1210-21.
3. Dolatabadi M, Świergosz T, Ahmadzadeh S. Electro-Fenton approach in oxidative degradation of dimethyl phthalate-The treatment of aqueous leachate from landfills. *Sci Total Environ.* 2021;772:145323.
4. Ahmed M, Hameed B. Removal of emerging pharmaceutical contaminants by adsorption in a fixed-bed column: A review. *Ecotoxicol Environ Saf.* 2018;149:257-66.
5. An C, Huang G, Yao Y, et al. Emerging usage of electrocoagulation technology for oil removal from wastewater: A review. *Sci Total Environ.* 2017;579:537-56.
6. Dolatabadi M, Mehrabpour M, Esfandyari M, et al. Adsorption of tetracycline antibiotic onto modified zeolite: Experimental investigation and modeling. *MethodsX.* 2020;7:100885.
7. Yu Q, He C, Li Q, et al. Fluorometric determination of acetamiprid using molecularly imprinted upconversion nanoparticles. *Microchimica Acta.* 2020;187(4):1-10.
8. Šunta U, Prosenc F, Trebše P, et al. Adsorption of acetamiprid, chlorantraniliprole and flubendiamide on different type of microplastics present in alluvial soil. *Chemosphere.* 2020:127762.
9. Nicol E, Varga Z, Vujovic S, et al. Laboratory scale UV-visible degradation of acetamiprid in aqueous marketed mixtures-Structural elucidation of photoproducts and toxicological consequences. *Chemosphere.* 2020;248:126040.
10. Cruz-Alcalde A, Sans C, Esplugas S. Priority

- pesticides abatement by advanced water technologies: the case of acetamidrid removal by ozonation. *Sci Total Environ.* 2017;599:1454-61.
11. Fasnabi PA, Madhu G, Soloman PA. Removal of acetamidrid from wastewater by fenton and photo-fenton processes—optimization by response surface methodology and kinetics. *Clean-Soil, Air, Water.* 2016;44(6):728-37.
 12. Carra I, Sirtori C, Ponce-Robles L, et al. Degradation and monitoring of acetamidrid, thiabendazole and their transformation products in an agro-food industry effluent during solar photo-Fenton treatment in a raceway pond reactor. *Chemosphere.* 2015;130:73-81.
 13. Zhou Z, Liu X, Sun K, et al. Persulfate-based advanced oxidation processes (AOPs) for organic-contaminated soil remediation: A review. *Chem Eng J.* 2019;372:836-51.
 14. Mahamuni NN, Adewuyi YG. Advanced oxidation processes (AOPs) involving ultrasound for waste water treatment: a review with emphasis on cost estimation. *Ultrason Sonochemistry.* 2010;17(6):990-1003.
 15. An T, Yang H, Li G, et al. Kinetics and mechanism of advanced oxidation processes (AOPs) in degradation of ciprofloxacin in water. *Appl Catal B: Environ.* 2010;94(3):288-94.
 16. Zhao H, Zhang Q. Performance of electro-Fenton process coupling with microbial fuel cell for simultaneous removal of herbicide mesotrione. *Bioresour Technol.* 2020:124244.
 17. Moradi M, Elahinia A, Vasseghian Y, et al. A review on pollutants removal by Sono-photo-Fenton processes. *J Environ Chem Eng.* 2020: 104330.
 18. Zhang C, Ren G, Wang W, et al. A new type of continuous-flow heterogeneous electro-Fenton reactor for Tartrazine degradation. *Sep Purif Technol.* 2019;208:76-82.
 19. Gadekar MR, Ahammed MM. Modelling dye removal by adsorption onto water treatment residuals using combined response surface methodology-artificial neural network approach. *J Environ Manage.* 2019;231:241-8.
 20. Barisci S, Turkay O, editors. Applications of response surface methodology (RSM) for the optimization of ciprofloxacin removal by electrocoagulation. *Proceedings of the IWA Balkan Young Water Professionals Conference;* 2015.
 21. Bashir MJ, Aziz HA, Yusoff MS, et al. Application of response surface methodology (RSM) for optimization of ammoniacal nitrogen removal from semi-aerobic landfill leachate using ion exchange resin. *Desalination.* 2010;254(1):154-61.
 22. Hosny NM, Huddersman K, Atia NN, et al. Novel heterogeneous fenton's-like catalysis for degradation of colchicine coupled with extraction of its biologically active metabolite. *J Mol Liq.* 2019;295:111870.
 23. Wang S, Wu J, Lu X, et al. Removal of acetaminophen in the Fe²⁺/persulfate system: Kinetic model and degradation pathways. *Chem Eng J.* 2019;358:1091-100.
 24. Oturan N, Aravindakumar CT, Olvera-Vargas H, et al. Electro-Fenton oxidation of para-aminosalicylic acid: degradation kinetics and mineralization pathway using Pt/carbon-felt and BDD/carbon-felt cells. *Environ Sci Pollut Res.* 2018;25(21):20363-73.
 25. Barhoumi N, Olvera-Vargas H, Oturan N, et al. Kinetics of oxidative degradation/mineralization pathways of the antibiotic tetracycline by the novel heterogeneous electro-Fenton process with solid catalyst chalcopyrite. *Appl Catal B: Environ.* 2017;209:637-47.
 26. Fouladgar M, Ahmadzadeh S. Application of a nanostructured sensor based on NiO nanoparticles modified carbon paste electrode for determination of methyl dopa in the presence of folic acid. *Appl Surf Sci.* 2016;379:150-5.
 27. Bazarria B, Kumar P. Optimization of spray drying parameters for beetroot juice powder using response surface methodology (RSM). *J Saudi Soc Agric Sci.* 2018;17(4):408-15.
 28. Barışçı S, Turkay O. Optimization and modelling using the response surface methodology (RSM) for ciprofloxacin removal by electrocoagulation. *Water Sci Technol.* 2016;73(7):1673-9.
 29. Gamaralalage D, Sawai O, Nunoura T.

- Degradation behavior of palm oil mill effluent in Fenton oxidation. *J Hazard Mater.* 2019;364:791-9.
30. Liu X, Zhou Y, Zhang J, et al. Insight into electro-Fenton and photo-Fenton for the degradation of antibiotics: mechanism study and research gaps. *Chem Eng J.* 2018;347:379-97.
31. Nidheesh P, Gandhimathi R. Trends in electro-Fenton process for water and wastewater treatment: an overview. *Desalination.* 2012;299:1-15.
32. Vasudevan S. An efficient removal of phenol from water by peroxi-electrocoagulation processes. *J Water Process Eng.* 2014;2:53-7.
33. Arienzo M, Chiarenzelli J, Scudato R. Remediation of metal-contaminated aqueous systems by electrochemical peroxidation: an experimental investigation. *J Hazard Mater.* 2001;87(1):187-98.
34. Ozyonar F, Karagozolu B. Treatment of pretreated coke wastewater by electrocoagulation and electrochemical peroxidation processes. *Sep Purif Technol.* 2015;150:268-77.
35. Görmez F, Görmez Ö, Gözmen B, et al. Degradation of chloramphenicol and metronidazole by electro-Fenton process using graphene oxide-Fe₃O₄ as heterogeneous catalyst. *J Environ Chem Eng.* 2019;7(2):102990.
36. Chen S, Tang L, Feng H, et al. Carbon felt cathodes for electro-Fenton process to remove tetracycline via synergistic adsorption and degradation. *Sci Total Environ.* 2019;670:921-31.
37. Yu Q, Jin X, Zhang Y. Sequential pretreatment for cell disintegration of municipal sludge in a neutral Bio-electro-Fenton system. *Water research.* 2018;135:44-56.
38. Racar M, Dolar D, Karadakić K, et al. Challenges of municipal wastewater reclamation for irrigation by MBR and NF/RO: Physico-chemical and microbiological parameters, and emerging contaminants. *Sci Total Environ.* 2020;722:137959.
39. Yao Y, Teng G, Yang Y, et al. Electrochemical oxidation of acetamiprid using Yb-doped PbO₂ electrodes: Electrode characterization, influencing factors and degradation pathways. *Sep Purif Technol.* 2019;211:456-66.