

Landfill Site Selection Using Geographic Information System and Fuzzy-AHP Model: A Case Study of Ilam Township, Iran

Mehdi Ahmadi^{1*}, Mehdi Nikseresht², Esmail Najafi³, Behzad Morshedi⁴

¹ Department of Geomorphology, Faculty of Planning and Environmental Sciences, University of Tabriz, Tabriz, Iran.

² Department of Geography, Faculty of Human Science, University of Payame Noor, Tehran, Iran.

³ Department of Geomorphology, Faculty of Earth Sciences, University of Damghan, Damghan, Iran.

⁴ Department of Political Geography, Faculty of Human Science, Islamic Azad University, Rasht Branch, Rasht, Iran.

ARTICLE INFO

ORIGINAL ARTICLE

Article History:

Received: 04 April 2020

Accepted: 10 July 2020

*Corresponding Author:

Mehdi Ahmadi

Email:

Mehdi.Ahmadi2009@gmail.com

Tel:

+989189405535

Keywords:

Landfill,
Fuzzy-AHP,
Geographic Information
System,
Ilam City.

ABSTRACT

Introduction: Landfill siting is a difficult, complex, and protracted process, which requires evaluating different criteria. A suitable site should be located to dispose the municipal solid wastes hygienically (sanitary landfill), which is one of the fundamental subjects related to the environmental stability of the human settlements. The aim was to select a suitable waste disposal area using fuzzy-Analytic Hierarchy Process (AHP) models.

Materials and Methods: To conduct this study, the information about elevation, slope, soil, drainage, vegetation, land use, population, and roads were produced and corrected in layers called shape files using the Geographic Information System (GIS) software. Finally, weights were applied in expert choice software by combining and overlapping information layers in GIS.

Results: Based on the fuzzy-AHP model, 6 sites were identified as suitable areas for municipal waste disposal. Among the selected sites, one site was highly suitable, two were suitable, and three sites were moderately suitable. These areas with an area of 83.8 km² are located along the west part of the city adjacent to the Iraqi border. The unsuitable sites for municipal waste disposal were located in the eastern and northeastern areas.

Conclusion: However, applying fuzzy-AHP model provides the necessary conditions for assessing effective relationships among discrete criteria. In the end, combining these models and their findings represented advantages of this kind of modeling and improved scoring in all of these pixels.

Citation: Ahmadi M, Nikseresht M, Najafi E, et al. *Landfill Site Selection Using Geographic Information System and Fuzzy-AHP Model: A Case Study of Ilam Township, Iran*. J Environ Health Sustain Dev. 2020; 5(3): 1043-52.

Introduction

In recent years, the suitable landfill site selection has attracted the attention of numerous researches and academic studies¹⁻³. Despite the efforts to prevent, reduce, and, recycle the wastes, appropriate management of the Municipal Solid Waste (MSW) is a major environmental crisis^{4, 5}. If landfill selection does not meet the standards, landfills will have harmful impacts on the environment. Therefore, suitable siting of landfills is one of the

important factors in waste management and planning^{6, 7}. This issue is of great importance, especially with the rapid growth of the urban communities and the effects caused by solid waste dumps in the areas surrounding settlements⁸. The suitable area for landfill selection has always been a difficult and complicated process^{9, 10}. Wide range of methods exists for landfill siting, which can find a suitable area for such installations. Most related studies in this field used the Geographic Information

System (GIS) technique as a proper tool to manage large volumes of spatial data from a variety of sources^{11, 12}. However, concerns exist about the destructive effects of inappropriate landfill dumping from

the past to the present^{13, 14}. Modern landfill techniques require cost and time^{15, 16}. MSW is a waste type that contaminates the environment and creates inappropriate environmental conditions. The MSW management is a major challenge in urban areas throughout the world, especially in the cities of developing countries^{17, 18}. The inappropriate and unsafe burial of these wastes makes recycling difficult¹⁹. Given that site selection for MSW is a critical factor for managing wastes, selecting a suitable landfill site is of great importance. Disposal of urban waste has now become one of the challenges in the world²⁰⁻²². In the city of Ilam, large amount of waste is produced daily, which is buried in unsafe ways²³. Selection of the suitable areas for MSW in the study area is the first step in waste management,^{24, 25} which involves studying spatial environment, collecting relevant information, as well as careful analyzing data. Furthermore, selecting a suitable model for landfill location is very important. Various models and methods were applied to select suitable landfill sites in various contexts such as models, Boolean logic, as well as fuzzy and hierarchical models^{26, 27}. The most

important factors for selecting a landfill site include exact selection of factors, preparation of layers, accurate field examination, and calculation of the model accuracy^{28, 29}. Many researchers used a variety of methods in the field of MSW Collection by GIS³⁰. In this regard, we can refer to Fuzzy models with expert classification³¹⁻³³. These researchers evaluated many environmental factors such as climate, topography, slope, soil, drainage, vegetation, land use, population, and road to identify the suitable areas. Many researchers applied other models in waste disposal management^{34, 35}. In fact, their goal was to combine several models and compare them to select appropriate areas for waste disposal. The results of many studies show the efficiency of GIS and remote sensing in waste management of urban areas, which are buried improperly. No research has been conducted in this field to identify suitable areas for waste disposal. So, this study was carried out to fill this gap in the research literature and achieve precise and applied results in Municipal Solid Waste in areas with high vulnerability and low number of conservation programs. Regarding the daily production of 220 tons of waste in the city of Ilam as well as the lack of suitable places for landfilling and municipal waste dumping, this study was conducted to assess and compare the fuzzy-AHP models used for landfill in Ilam (Figure 1).

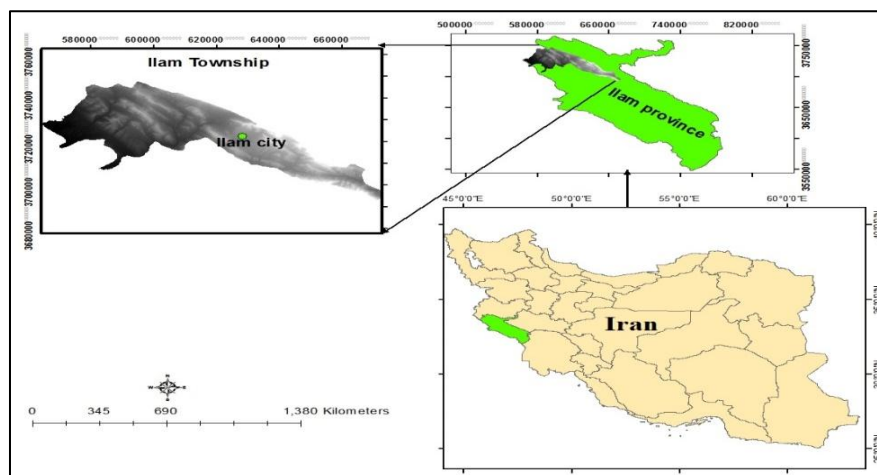


Figure 1: Location of the study area.

Materials and Methods

In the present study, the aim was to select a suitable area for municipal waste disposal using fuzzy-AHP model. Preliminary information and data were collected using both desk research and field studies. To identify suitable areas for landfill, the map of topography, slope, rain, faults, land use, and hydrology were used. In this research, the initial goal was to select a suitable site for landfill

in Ilam City. At the second stage, 7 sub-criteria were considered: 1: Geological, 2: Pedology, 3: Hydrological, 4: Hydrogeological, 5: Meteorology, 6: Communication path, 7: Population centers. At the third level, 28 sub-criteria were included (Figure 2). This hierarchical method (fuzzy-AHP) helps decision-makers to address and solve a complex problem in a hierarchical structure (Table 1).

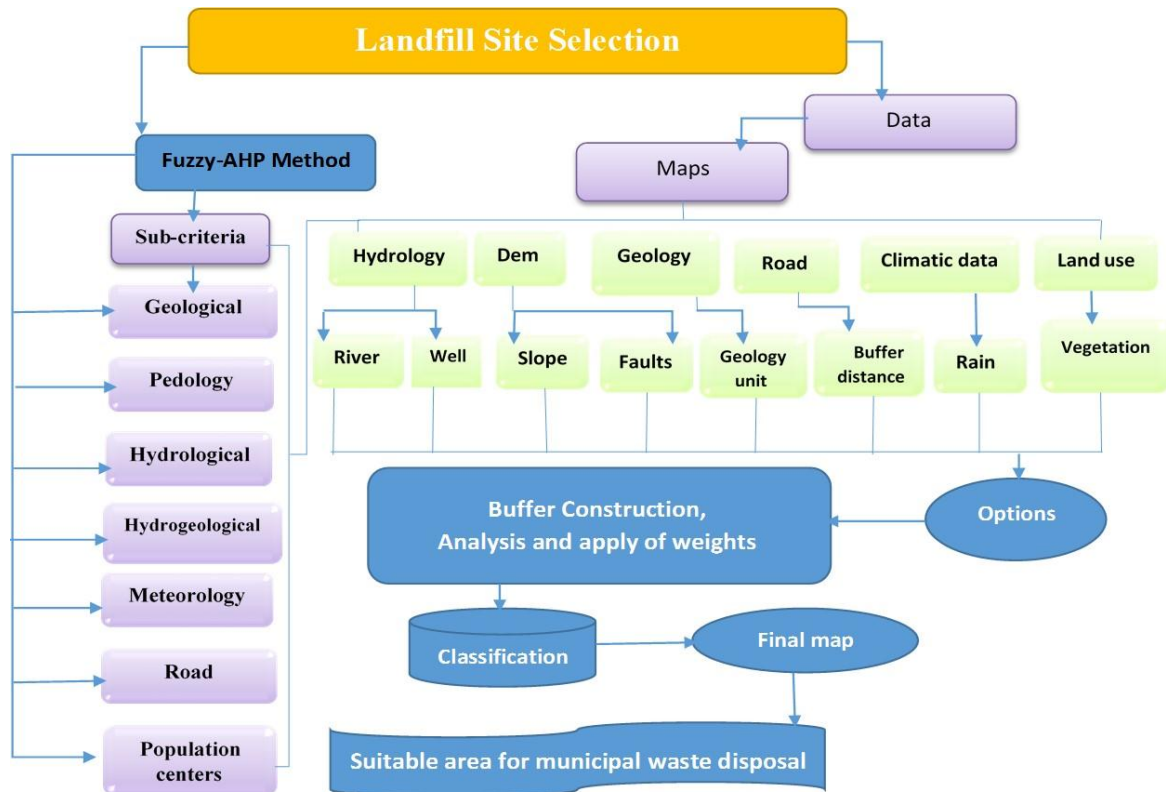


Figure 2: Flowchart of the methodology used in this study.

In this study, we applied GIS in managing and planning landfill selection. Unfortunately, some shortcomings were reported in the model selection or the data implementation phase in a GIS environment^{36, 37}. To fix these shortcomings, fuzzy-AHP models were combined to give more precise results. In this study, an algorithm was developed for the proposed fuzzy-AHP approach in three phases of retied, aggregation, and selection parts. The

following equation was used to compare pairwise between criteria, sub-criteria, and options. (Equation 1).^{38, 39}

$$ni_j = \frac{r_{ij}}{\sum_{i=1}^n r_{ij}} \tag{1}$$

Where, the value of each criterion (r_{ij}) in the decision matrix is divided into the total values of r_{ij} , in each column.

Table 1: The preference values in fuzzy-AHP method.

| Importance | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|------------|-------|------|-----------|----------|-------------------|--------|-------------|-------------------|--------------------|
| Definition | Equal | Weak | Important | Moderate | Strong importance | Strong | Very strong | Very, very strong | Extreme importance |

In present study, the consistency index (CI) was computed using equation (2) to ensure that the priority ratio is consistent. Afterwards, based on the CI and a random index (RI), the consistency ratio (CR) was calculated using equation (3):

$$CI = \frac{\lambda_{max} - n}{n - 1} \tag{2}$$

$$CR = \frac{CI}{RI} \tag{3}$$

Where, n is the number of items compared in the matrix; λ_{max} is the largest eigenvalue and RI is a random CI obtained from a large number of simulation runs that varies upon the order of matrix (Table 2) ^{40, 41}.

Table 2: Random index

| N | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|----|---|---|------|------|------|------|------|------|------|------|------|------|------|------|------|
| RI | 0 | 0 | 0.58 | 0.90 | 1.12 | 1.24 | 1.32 | 1.41 | 1.45 | 1.49 | 1.51 | 1.48 | 1.56 | 1.57 | 1.58 |

Results

Geological parameters

Soil texture, alluvial thickness, slope, and distance from the main and minor faults, earth instability, and seismic hazard were studied as geological parameters. For each soil texture parameter, the distance from faults and slope was from 0.082 to 0.129 according to the importance of the investigated area in locating the waste disposal site (Table 3).

Parameters of soil

In determining the soil factors, the vegetation layer was used. At this stage, five layers including soil erosion, permeability, land use, vegetation, as well as land suitability and capability were considered as soil parameters. At this stage, the minimum and maximum weights of 0.049 and 0.075 were considered for soil factors.

Hydrological parameters

According to Siddiqui, an 800 m buffer is a suitable protective boundary to avoid contamination

of surface waters by solid wastes ⁴². However, Chang suggests that a distance in 0–1 km from rivers is not suitable and distances more than 1 km are suitable for landfill because more distance from surface water resources such as rivers decrease the risk of river contamination ⁴³⁻⁴⁵. To avoid surface water contamination, we considered a buffer of 600–3,000 m from rivers (Table 4). ^{46, 47} Nas suggests that a boundary less than 0.3 km from wells is not protective because toxic gases are released at landfills, which can be a serious threat to these water resources ⁴⁸. Therefore, we considered a protective boundary of 0.3–3.5 km from groundwater as an appropriate buffer for Ilam landfill.

Meteorological factor

In the first stage, two layers of evaporation and rainfall data were considered. At this stage, the minimum and maximum total weights were 0.013 and 0.017 for the meteorological parameters, respectively.

Table 3: Comparative weight of sub-criteria in fuzzy-AHP method.

| Geological | Pedology | Hydrological | Hydrogeological | Meteorology | Road | Population centers |
|------------|----------|--------------|-----------------|-------------|-------|--------------------|
| 0.471 | 0.274 | 0.144 | 0.073 | 0.055 | 0.047 | 0.039 |

Table 4: Brief characterization of the 6 sites of interest identified in the area.

| Areas | Land use | Topography | Penetrable | Distance to Fault(km) | Rain(mm) | Distance to drainage(km) |
|--------|----------|------------|------------------|-----------------------|----------|--------------------------|
| Area 1 | Arid | Lowland | High | 3 | 425 | 5 |
| Area 2 | Arid | Lowland | Moderate | 1.5 | 400 | 4 |
| Area 3 | Arid | Moderate | Moderate | 1.7 | 370 | 3.5 |
| Area 4 | Pasture | Moderate | Moderate and low | 1.5 | 370 | 3 |
| Area 5 | Pasture | Moderate | Low | 1.5 | 370 | 2.7 |
| Area 6 | Pasture | High | Low | 1 | 480 | 600m |

Residential areas

Qanavati and Sorkhi suggested that the municipal landfill should be located at a distance of over 300 m from the main residential areas (including towns and villages). Sener considered that a distance of 1,000 m from the rural residential areas was inappropriate, while a distance of more than 1 km was appropriate⁴⁹. Since our study area was small, we considered 300 and 2,000-meter distance of landfill from residential areas as the minimum and maximum distances, respectively. Allen believed that the appropriate threshold for landfill from towns with a population of more than 500 people was 1–5 km. However, Sener found that a distance of 5–30 km from the main city was a suitable boundary from landfill. We considered a distance

of 1–5 km as a suitable boundary of landfill from Ilam. Due to the high costs of facilities required for sanitary landfill, allocating a common landfill for several small cities and towns would be a much better option. At this stage, the total maximum and minimum weights of 0.009 and 0.007 were considered for the Residential parameters (Table 5). After selecting appropriate sites for the landfill using fuzzy-AHP, different regions were classified according to their suitability (Figure 3). Based on the fuzzy-AHP model, 6 sites were identified as suitable areas for municipal waste disposal. Among the selected sites, one site was highly suitable, two were suitable, and three sites were moderately suitable (Figure 4).

Table 5: Comparative weight of options in fuzzy-AHP method.

| | | | | | |
|-----------------------|----------------------------|-----------------------------|------------------------------|---------------------------|------------------|
| Distance to fault | Variation | Landslide | Erosion | Penetrable | Land use |
| 0.129 | 0.087 | 0.082 | 0.075 | 0.069 | 0.57 |
| Vegetable | Capability land use | Distance to drainage | Distance to main stream | Distance to dam | Distance to well |
| 0.051 | 0.049 | 0.037 | 0.033 | 0.029 | 0.026 |
| Depth ground water | Quality ground water | Flow direction | Evaporate | Rain(mm) | Speed wind |
| 0.024 | 0.021 | 0.019 | 0.017 | 0.015 | 0.013 |
| Distance to main road | Distance to secondary road | Distance to line convection | Distance to village and city | Distance to industry city | Protected area |
| 0.012 | 0.011 | 0.010 | 0.009 | 0.008 | 0.007 |

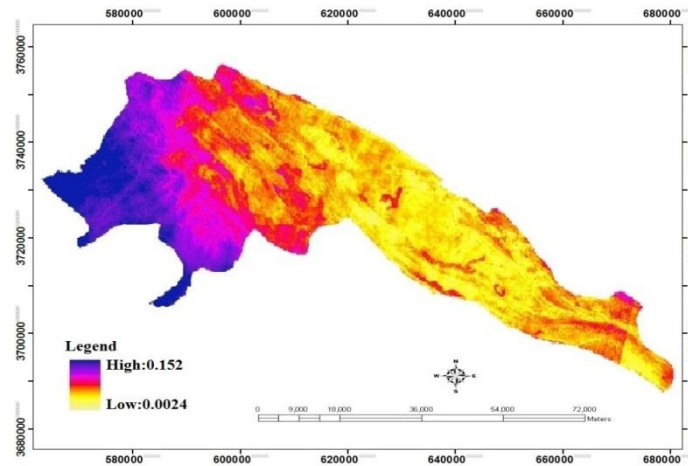


Figure 3: Suitable areas to landfill based on fuzzy-AHP model

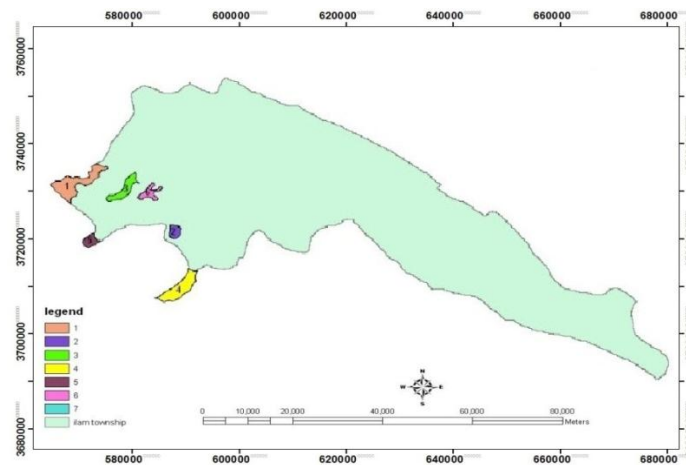


Figure 4: Selected sites to landfill using fuzzy-AHP model

Discussion

Suitable areas for landfill were located in the northwest of Ilam. Considering that this area is located in a high rainfall area, it is covered with agricultural lands and forests. These areas have poor vegetation with suitable bedrock, good distance from surface waters, communication paths, and residential areas. These regions with an area of 83.8 km² are located along the west of the city and adjacent to the Iraqi border. The height of this area is between 347 and 425 meters. The aggregates are calcareous sediments along with silt and clay. The gradient of these areas is appropriate. Most of the range is composed of limestones of the Asmari. A very small part of the range 3 in the south is the periodicity of red to gray gravel and limestone with

gypsum mildew. The landfills (n = 6) mainly located in the western part of the city Ilam were appropriate considering the environmental characteristics, special environmental, and natural conditions. The selected sites were studied more precisely than others. At this stage, 3 selected areas, including sites 3, 2, and 1 were studied using maps with a scale of 1: 25000 and field observations were studied in more details. Among the selected sites, site 1 was more suitable for landfill. The current conditions of the waste disposal site in Ilam City show that the site does not meet the necessary criteria for waste disposal, such as distance from the fault and water sources. Proximity to the fault increases the likelihood of earthquake-induced contamination⁵⁰. The proximity of the landfill to the drainage

increases the likelihood of contamination of water sources⁵¹. Comparing the characteristics of the selected sites with the environmental criteria of the waste disposal sites of the Environmental Protection Organization⁵² shows that the sites selected based on the fuzzy-AHP model have the maximum level of suitability and are good for a period of ten years. Given that the selected sites are located in the western part of the region and away from the residential areas, they are suitable. Land use study shows that the selected sites are located in areas with poor land use and have suitable conditions for waste disposal based on the environmental criteria. West of Ilam Township has a suitable condition for waste disposal in a long period. This area has appropriate environmental standards such as hydrology, geology, land use, meteorology, and distance from residential facilities. So, it can be used to dispose wastes in Ilam for a period of ten years without negative environmental impacts. The current landfill in Ilam is located in a forested area near the city and poses an environmental threat; so, the selected sites can replace the current site and reduce the environmental hazards.

Conclusion

The urban development of Ilam city during recent years was due to combination of villages and natural growth of the city. In the process of this demographic shift, the needs and consumption of natural and artificial materials were in the form of waste materials (waste) in quantity and quality and daily production of more than 220 tons of waste in a natural environment. In locating the landfill of Ilam City, many environmental factors were considered such as fault, agricultural lands, human settlements, soil, and urban development process based on fuzzy-AHP. Finally, the areas in the West of the city were selected as the best sites for landfill. A combination of fuzzy-AHP methods was used in this study and the findings proved the validity of this method. Based on the findings, 6 areas were appropriate for waste landfill. Most areas were located in regions with poor pasture land and away from agricultural and urban areas. However, applying fuzzy-AHP model provides the

necessary conditions for assessing effective relationships among discrete criteria. In the end, combining these models and their findings represented advantages of this kind of modeling and improved scoring in all of these pixels.

Acknowledgment

The authors are grateful to all those who have supported the production and publication of this article, the authors are grateful to Dr. Nabin Baral from University of Washington for providing helpful comments and reviewing the manuscript.

Funding

There were no funding sources for this study.

Conflict of Interest

The authors confirm that there is no conflict of interest regarding the publication of this article.

This is an Open-Access article distributed in accordance with the terms of the Creative Commons Attribution (CC BY 4.0) license, which permits others to distribute, remix, adapt, and build upon this work, for commercial use.

References

1. Rezaei M, Ghobadian B, Samadi SH, et al. Electric power generation from municipal solid waste: A techno-economical assessment under different scenarios in Iran. *Energy*. 2018;152 (1): 46-56.
2. Babalola A, Busu I. Selection of landfill sites for solid waste treatment in Damaturu Town-using GIS techniques. *J Environ Prot*. 2018;2(1):1-10.
3. Vukovic N, Pobedinsky V, Mityagin S, et al. A study on green economy indicators and modeling: russian context. *Sustainability*. 2019;11(17):1-13.
4. Landreth RE, Rebers PA. *Municipal solid waste: Problems and solutions*. CRC Press, Boca Raton. 1997.
5. Polzonetti A, Sagratella M. Smart city and green development. *Lecture notes in computer science. Conference on e-Business, e-Services and e-Society*. 2018 October 30- November 1; Kuwait City, Kuwait. springer; 2018.
6. Kontos TD, Komilis DP, Halvadakis CP. Siting MSW landfills with a spatial multiple criteria

- analysis methodology. *Waste Manag.* 2005;25(8):818-32.
7. Couto ND, Silva VB, Rouboa A. Thermodynamic evaluation of Portuguese municipal solid waste gasification. *J Clean Prod.* 2016;139(15):622-35.
 8. Ebistu TA, Minale AS. Solid waste dumping site suitability analysis using geographic information system (GIS) and remote sensing for bahir dar town, north western ethiopia. *Afr J Environ Sci Tech.* 2013;7(11):976-89.
 9. Abdoli M, Jalili Qazizadeh M, Samieifar R. Comprehensive solid waste management in Marivan Town. Iran Fifth National Congress. University of Ferdosi, Mashhad. 2010.
 10. Camboim GF, Zawislak PA, Pufal NA. Driving elements to make cities smarter: Evidences from European projects. *Technol Forecast Soc Change.* 2019;142:154-67.
 11. Zamorano M, Molero E, Hurtado Á, et al. Evaluation of a municipal landfill site in Southern Spain with GIS-aided methodology. *J Hazard Mater.* 2008;160(2):473-81.
 12. Wang G, Qin L, Li G, et al. Landfill site selection using spatial information technologies and AHP: a case study in Beijing, China. *J Environ Manage.* 2009;90(8):2414-21.
 13. Javaheri H, Nasrabadi T, Jafarian M, et al. Site selection of municipal solid waste landfills using analytical hierarchy process method in a geographical information technology environment in Giroft. *J Environ Health Sci Eng.* 2006; 3(3):177-84.
 14. Lou CX, Shuai J, Luo L, et al. Optimal transportation planning of classified domestic garbage based on map distance. *J Environ Manage.* 2020;254:109781.
 15. Rushton L. Health hazards and waste management. *Br Med Bull.* 2003,68(1):183-97.
 16. Moya D, Aldás C, López G, et al. Municipal solid waste as a valuable renewable energy resource: A worldwide opportunity of energy recovery by using Waste- To- Energy Technologies. *Energy Procedia.* 2017;134(17): 286-95.
 17. Farrell M, Jones DL. Critical evaluation of municipal solid waste composting and potential compost markets. *Bio resource Technology.* 2009;100(9):4301-10.
 18. Jovanov D, Vujic´ B, Vujic´ G. Optimization of the monitoring of landfill gas and leachate in closed methanogenic landfills. *J Environ Manage.* 2016;216(15):32-40.
 19. Zhen-Shan L, Lei Y, Xiao-Yan Q, et al. Municipal solid waste management in Beijing City. *Waste Manag.* 2009;29(9):2596-9.
 20. Ojeda-Benítez S, Beraud-Lozano JL. The municipal solid waste cycle in Mexico: final disposal. *Resour Conserv Recycl.* 2003;39(3):239-50.
 21. Daniel DE. *Geotechnical practices for waste disposal.* Chapman and Hall Pub, London. 1993.
 22. Bing X, de Keizer M, Bloemhof-Ruwaard JM, et al. Vehicle routing for the eco-efficient collection of household plastic waste. *Waste Manag.* 2014;34(4):719-29.
 23. Brian B, Michael VB, Jeff S, et al. Integrated waste management as a climate change stabilization wedge. *Waste Manag Res.* 2009; 27(9): 839-49.
 24. Safari E, Baronian C. Modeling temporal variations in leachate quantity generated at Kahrizak landfill. *Proc of International Environmental Modeling Software Society, (IEMSS'02).* Faculty of Environmental Engineering. University of Tehran. Tehran, Iran. 2002.
 25. Mingaleva Z, Shpak N. Possibilities of solar energy application in Russian cities. *Science.* 2015;19(2):457-66.
 26. Sener B. Landfill site selection by using geography information System. Master's Dissertation. Middle East Technical University. Ankara. Turkey. 2004.
 27. Merkhofer MW, Keeney RL. A multiattribute utility analysis of alternative sites for the disposal of nuclear waste. *Risk Analysis.* 1987;7(2):173-94.
 28. Olusina Joseph O, Shyllon DO. Suitability analysis in determining optimal landfill location using multicriteria evaluation (mce), gis & remote sensing. *International Journal of Computational Engineering Research.* 2014;4(6):7-20.
 29. Hokkanen J, Salminen P. The choice of a

- solid waste management system by using the ELECTRE III decision-aid method. In: Paruccini, M. (Ed.), *Applying Multiple Criteria Aid for Decision to Environmental Management*. Kluwer Academic Publishers. Dordrecht. 1994.
30. Salimova TA, Gouskova ND, Fedoskina L, et al. Competitiveness, sustainable development and import substitution problems in the Russian Federation. *Journal of Applied Economic Sciences*. 2017;12(4):1148-61.
 31. Hatamleh IR, Jamhawi MM, Al-Kofahi SD, et al. The use of a GIS system as a decision support tool for municipal solid waste management planning: The case study of Al Nuzha District, Irbid, Jordan. *Procedia Manuf*. 2020;44:189-96.
 32. Miran Lakota M, Stajniko D. Using of GIS tools for analysis of organic waste management in Slovenia Region Pomurje. *Procedia Technol*. 2013;8:570-4.
 33. Hariz HA, Dönmez CC, Sennaroglu B. Siting of a central healthcare waste incinerator using GIS based Multi-Criteria Decision Analysis. *J Clean Prod*. 2017;166(10):1031-42.
 34. Abu Samah M, Abd Manaf L, Ahsan A, et al. Household solid waste composition in Balakong city, Malaysia: trend and management. *Pol J Environ Stud*. 2013;22 (6):1807-16.
 35. Nour Madi N, Srour I. Managing emergency construction and demolition waste in Syria using GIS. *Resour Conserv Recycl*. 2019;141:163-75.
 36. Hokkanen J, Salminen P. Choosing a solid waste management system using multicriteria decision analysis. *Eur J Oper Res*. 1997;98(1):19–36.
 37. Zadeh L. A Fuzzy sets. *Inf Comput*. 1965; 8(3):338–53.
 38. Yuksel I, Dagdeviren M. Using the fuzzy analytic network process (ANP) for balanced score card (BSC): a case study for a manufacturing firm. *Expert Syst Appl*. 2010; 37(2):1270–8.
 39. Ayag Z, Ozdemir RG. A hybrid approach to concept selection through fuzzy analytic network process. *Comput Ind Eng*. 2009;56(1):368–79.
 40. Chaudhary P, Chhetri SK, Joshi KM, et al. Application of an Analytic Hierarchy Process (AHP) in the GIS interface for suitable fire site selection: A case study from Kathmandu. *Socioecon Plann Sci*. 2016;53:60-71.
 41. Kheikhah Zarkesh MM, Almasi N, Taghizadeh F. Ecotourism land capability evaluation using spatial multi criteria evaluation. *Int J Res Appl Sci Eng Technol*. 2011;3(7):693–700.
 42. Kapilan S, Elangovan KJ. Potential landfill site selection for solid waste disposal using GIS and multicriteria decision analysis (MCDA). *J Cent South Univ*. 2018;275(25):570–85.
 43. Chang NB, Parvathinathanb G, Breeden JB. Combining GIS with FUZZY multi criteria decision making for landfill siting in a fast-growing urban region, Texas, USA. *J Environ Manag*. 2008;87(1):139–53.
 44. Ebrahimi O, Ahmadi M, Shahabi H, et al. Evaluation of karst features using principal component analysis (PCA): A case from Zarneh and Kergan, Western Iran. *Carbonates Evaporites*. 2017;33(1):625–35
 45. Ahmadi M, Mokhtari D, Hejazi A, et al. Comparing WEPP and hydro physical models to estimate soil erosion and sediment production: A case study of Chardavol watershed. *Journal of Environmental Erosion Research Hormozgan University*. 2018;3(27):1–24.
 46. Mahamid I, Thawaba S. Multi criteria and landfill site selection using GIS: a case study from Palestine. *The Open Environmental Engineering Journal*. 2010;3:33–41.
 47. Asgari S, Ahmadi M, Hemati M. Chrdavl riverbank erosion in GIS using HEC-RAS model. *St Georg Hosp Gaz*. 2015;30(1):71-80.
 48. Nas B, Cay T, Iscan F, et al. Selection of MSW landfill site for Konya, Turkey using GIS and multi-criteria evaluation. *Environ Monit Assess*. 2009;160(1-4):491–500.
 49. Şener B, Lütfi Süzen M, Vedat D. Landfill site selection by using geographic information systems". *Environ Geol*. 2006;49(3):376-88.
 50. Makhdom M, Darvishsefat AA, Jafarzadeh H, et al. *Environmental evaluation and planning by geographic information system (GIS)*. Tehran University Press. 2001.
 51. Gorsevski PV, Donevska KR, Mitrovski CD, et

al. Integrating multi-criteria evaluation techniques with geographic information systems for landfill site selection: A case study using ordered weighted average. *Waste Manag.* 2012;32(2):287-

96.
52. Shaeri AM, Rahmati, AR. *Laws, regulations, standards and human environment.* Tehran: Hack press. 2011.